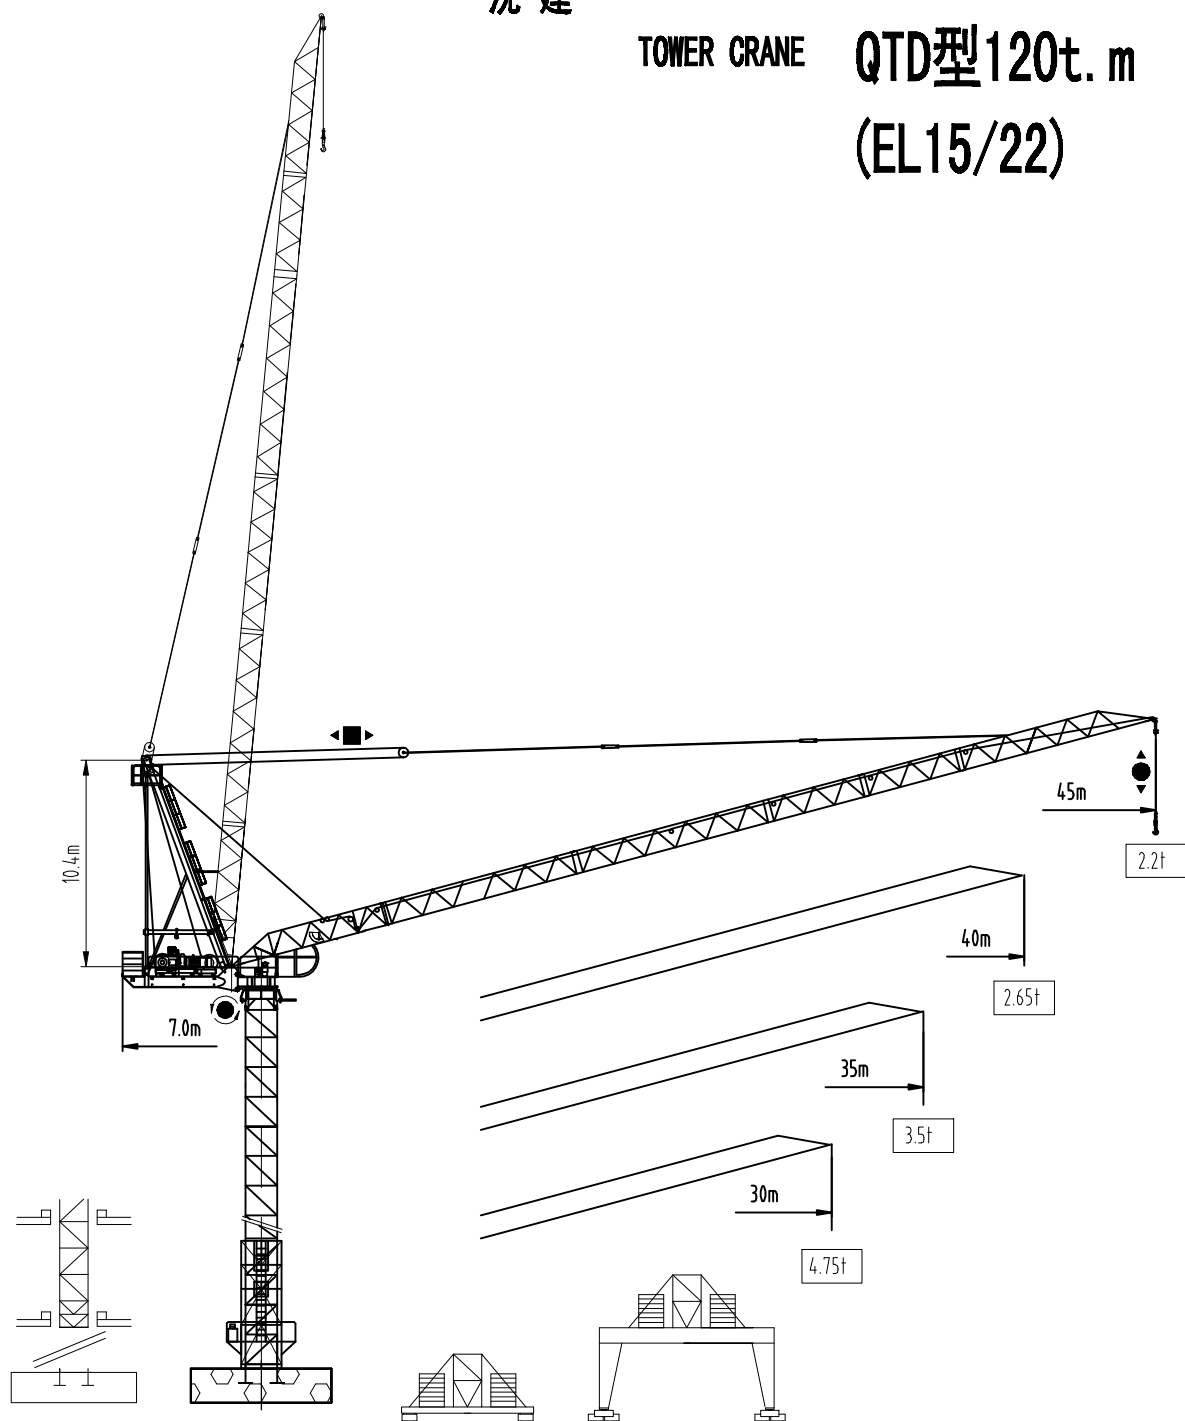




沈阳三洋建筑机械有限公司
SHENYANG SANYO BUILDING MACHINERY CO., LTD

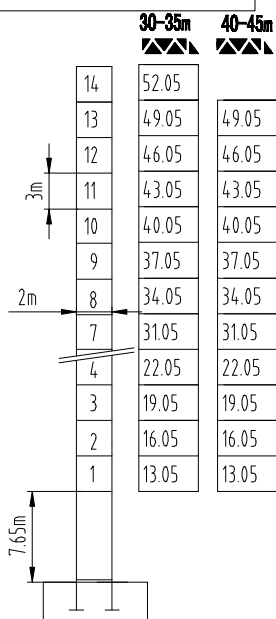
TOWER CRANE QTD型120t. m
(EL15/22)






塔身截面 Mast $\square 2m \times 2m$


30-45m



F2	• 115t	■ 217t
F3	• 70t	■ 180t
	6t	

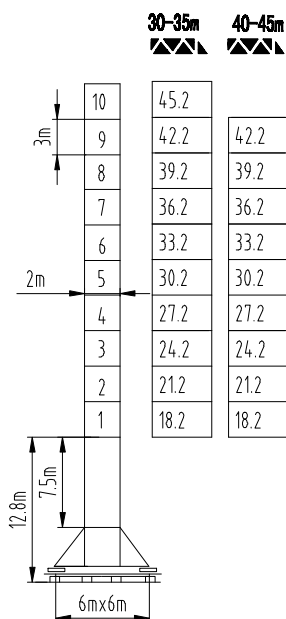


F1	• 65t	■ 89t
	56t	

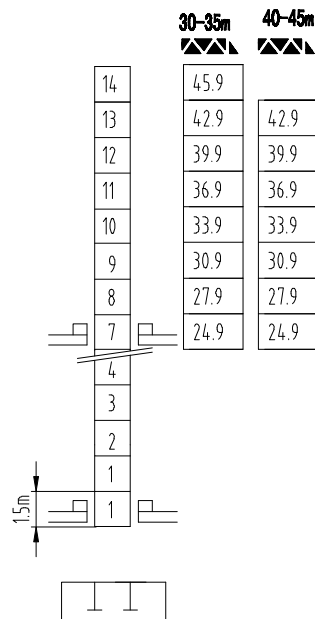


塔身截面 Mast $\square 1.6m \times 1.6m$

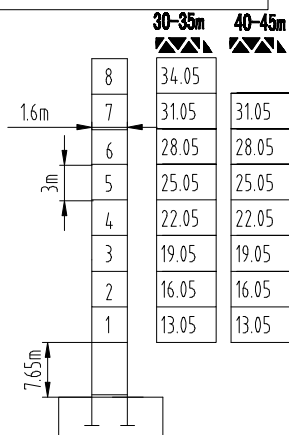
30-50m



F2	• 110t	■ 135t
F3	• 82t	■ 105t
	43t	

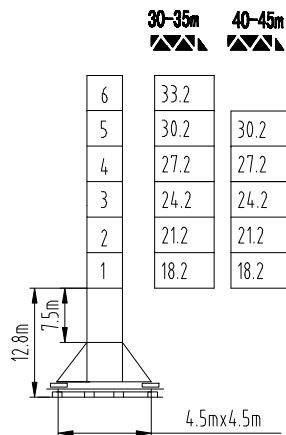

F1	• 60t	■ 68t
	45t	

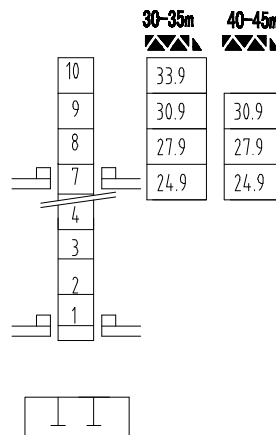


固定式附着高度 Anchoring height of stationary crane

★ 紧固附着框 Anchorages tightened






△ 放松附着框 Anchorages released

如需达到更高的高度, 请与我们联系. For greater heights, consult us.

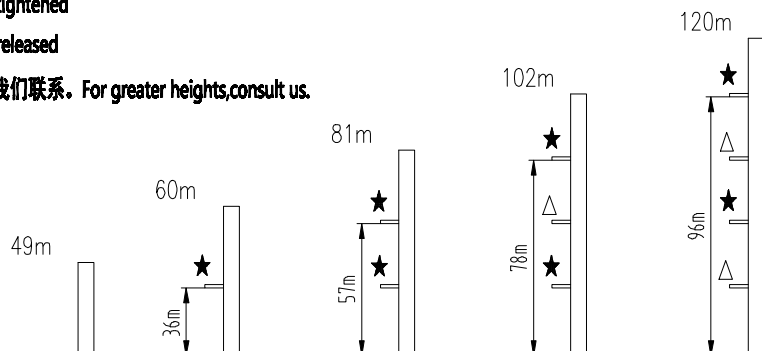塔身截面 Mast $\square 2m \times 2m$





载荷特性 Load diagrams

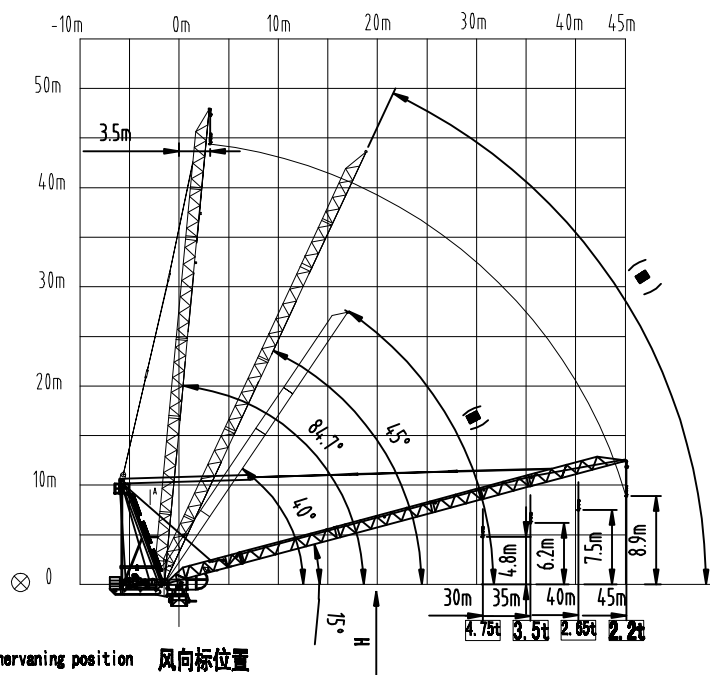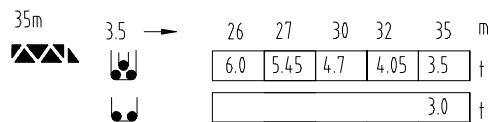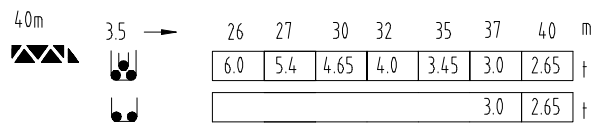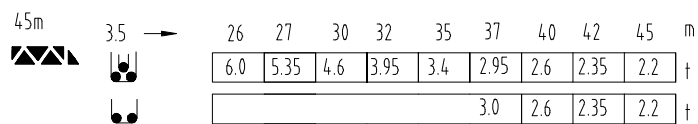

■ Weather vaning position 风向标位置

⊗ Jib hinge shaft 臂根铰点

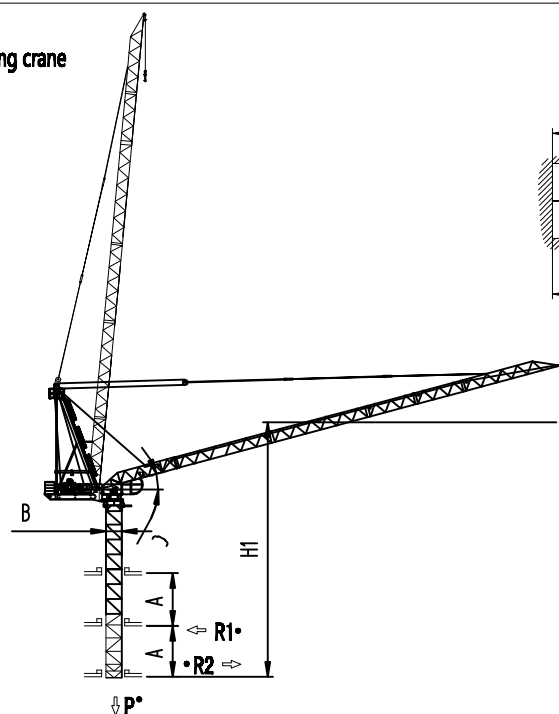内爬塔机 Climbing crane















A	16m-19m
B	2m
C	15°-84.7°
D	2.58m
E	2.17m
F	1.495m
H1	42.9m
R1°	26t-30t
R2°	13.1t-17t
P°	82t









● 工作状态无系数

In service without coefficient

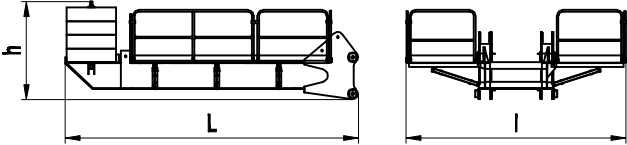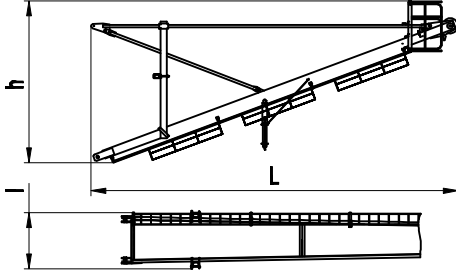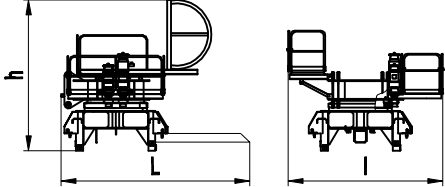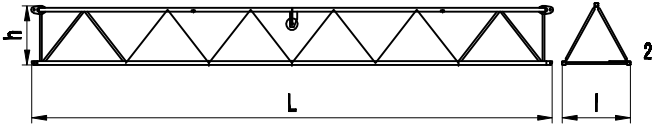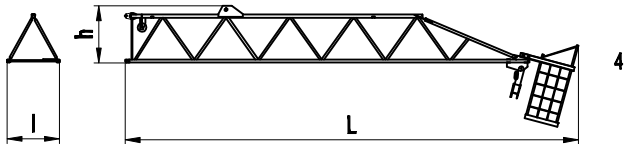外形尺寸重量表 Dimensions weights

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
平衡臂 Counter-jib		5.92	4.44	1.98	4155
塔头 Cat-head		4.89	1.70	11.12	3724
回转总成 Pivot	 □1.6m □2m	4.56	3.96	3.64	5232
		4.56	3.96	3.64	5232
起重臂节 Jib section		8.36	1.42	1.40	838
起重臂节 Jib section		10.12	1.33	1.25	685
起重臂节 Jib section		5.12	1.33	1.25	369
起重臂节 Jib section		11.45	1.33	2.88	1152

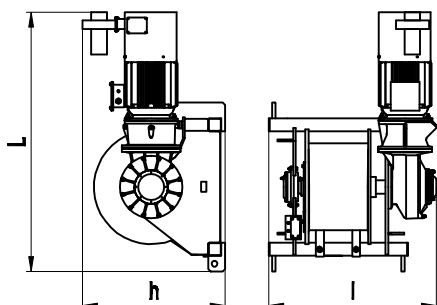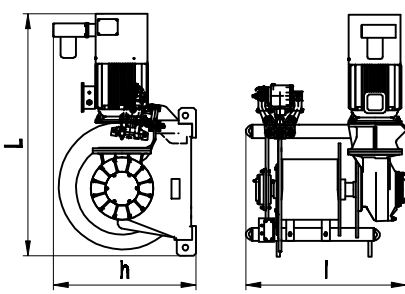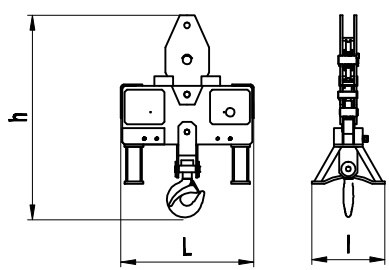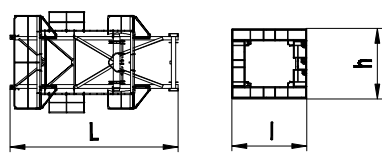塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg
变幅滑轮组 Luffing pulley block		1.82	0.65	0.63	253
起升机构 Hoisting mechanism		1.97	1.27	1.09	1800
变幅机构 Luffing mechanism		1.84	1.27	1.09	2200
吊钩滑轮组 Hook assembly		1.08	0.59	1.64	481
顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg
顶升套架 Telescopic cage	 ▣1.6m ▣2m	6.79 7.26	3.44 4.3	3.44 4.05	3495 4863

塔身部分 Mast		L(m)	l(m)	h(m)	Kg
基础节 Basic mast	 □1.6m 7.76 1.70 1.76 2625 □2m 7.76 2.0 2.1 3790				
标准节 Standard mast	 □1.6m 3.28 1.70 1.76 1188 □2m 3.28 2.0 2.1 1577				
底部 Base		L(m)	l(m)	h(m)	Kg
固定支脚 Fixing angles	 □1.6m 1.195 0.49 0.49 181.5 □2m 1.2 0.6 0.6 295				
底架塔节 Chassis mast	 □1.6m 3.69 2.00 2.00 2240 □2m 3.80 2.50 2.50 3780				
底架纵梁 Side member	 □1.6m 6.32 2.08 0.54 1200 □2m 7.14 2.484 0.54 2140				
底架横梁 Traverse	 □1.6m 4.88 0.467 0.705 1110 □2m 6.38 0.58 0.808 1500				
底架撑杆 Brace rod	 □1.6m 3.86 0.27 0.28 350 □2m 4.45 0.34 0.37 620				
底架水平杆 Horizontal member	 □1.6m 1.66 0.17 0.12 65 □2m 2.44 0.22 0.24 205				


机 构 特 性 Mechanisms specification														 m	K _w
起 升 Hoisting		30LVF	m/min	0-5.28	0-22	0-44	0-66	0-88	0-2.64	0-11	0-22	0-33	0-44	517	30
			t	3.0	3.0	3.0	1.5	0.75	6.0	6.0	6.0	3.0	1.5		
变 幅 Luffing		30DVF	min	0-3											30
回 转 Slewing		5.5SVF	r/min	0-0.8											5.5x2
		95SVT													95Nm x2
行 走 Travelling		4TRVF	m/min	0-12											4x4

 电源	Power Supply	380V 50Hz /440V 60Hz
KVA 供电容量	Necessary Electric Power	200KVA

平衡臂配置
Counter-jib ballast

		 (t)
45m	7.0m	15
40m	7.0m	12
35m	7.0m	10
30m	7.0m	10

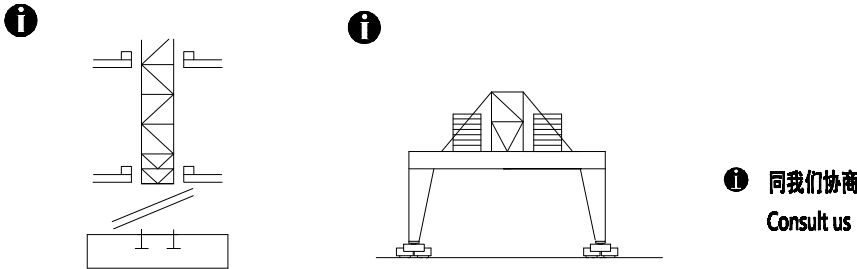可变换的其它安装方式
Mounting possibilities



F 反力 Reactions	• 工作状态	In service	Ⓜ 自重 Self-load	不带载荷及配重，最大臂长及标准高度时的自重。
	▪ 非工作状态	Out of service		Without load and counter-weight with longest jib and standard height